

Configuring Google as an OAuth Provider in PHPKB

Palwinder Singh

9.33K 0

Configuring Google as an OAuth Provider in PHPKB Knowledge Base Software is a process that enables users to log in to PHPKB using their Google credentials. This can be a convenient and secure way for users to access the system, as it eliminates the need for separate login credentials and ensures that users are authenticated by a trusted third party.

How to configure Google as an OAuth provider in PHPKB?

In this tutorial, you will learn how to configure **Google** as **OAuth Provider** with PHPKB OAuth plugin.

PHPKB OAuth Authentication Plugin

The OAuth 2.0 authentication plugin enables users to log in using their Google, Microsoft, Facebook, or any other account via buttons on the login page of your knowledge base.

Interested to buy this plugin? [Contact Us](#) for Licensing & Pricing.

To configure Google as an OAuth Provider in PHPKB, follow these steps:

PHP Requirements:

- PHP 7.0 or later
- CURL extension
- JSON extension
- OpenSSL extension

Download & Installation:

Extract the package (that you received after purchasing this plugin), copy all the files & folders, and paste them at their respective locations under the installation directory of [PHPKB Knowledge Management Software](#) on your server. There is a new folder, called '**add-ons**' (applicable to PHPKB v9.0), copy that and put it directly under the root folder (i.e. outside **/admin/** folder) of the PHPKB package.


Step 1: Setup Google as an OAuth Provider

- Go to <https://console.developers.google.com> and click on "Login / Signup".
- Click on **Select a project**, and you will see a popup with a list of all your projects.


1#1 Forbidden

You don't have permission to access this resource.

Additionally, a 403 Forbidden error was encountered while trying to use an ErrorDocument to handle the request.

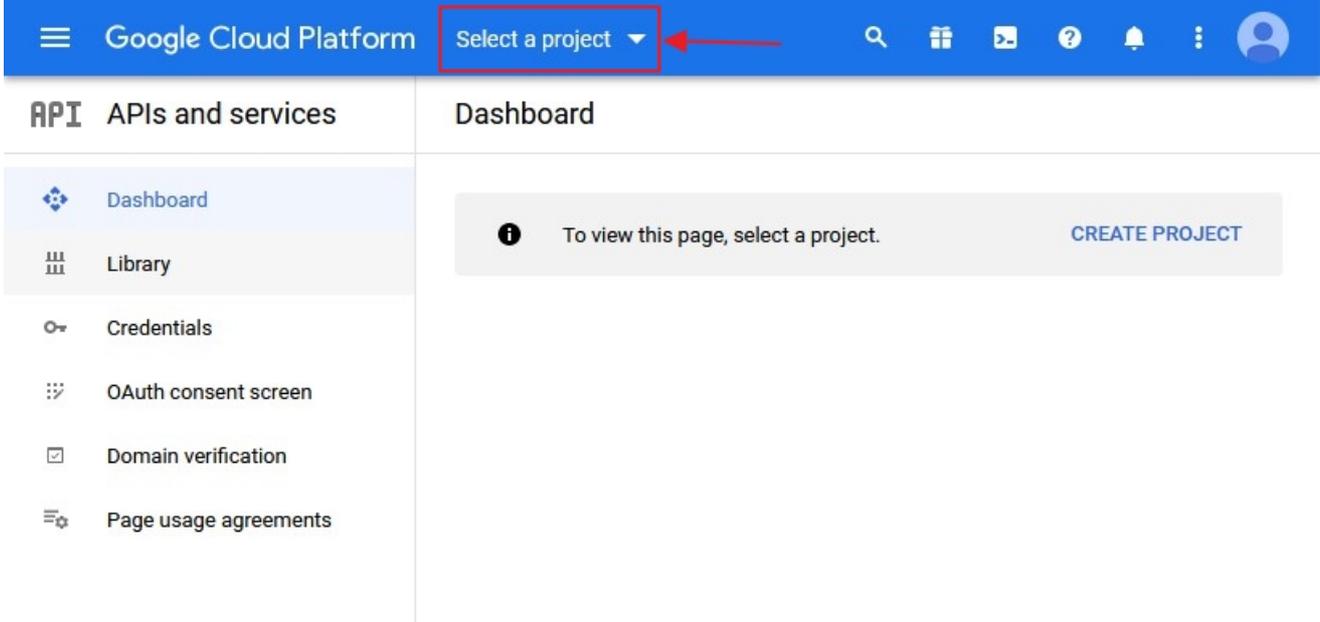

- You can click on the **New Project** button to create a new project.

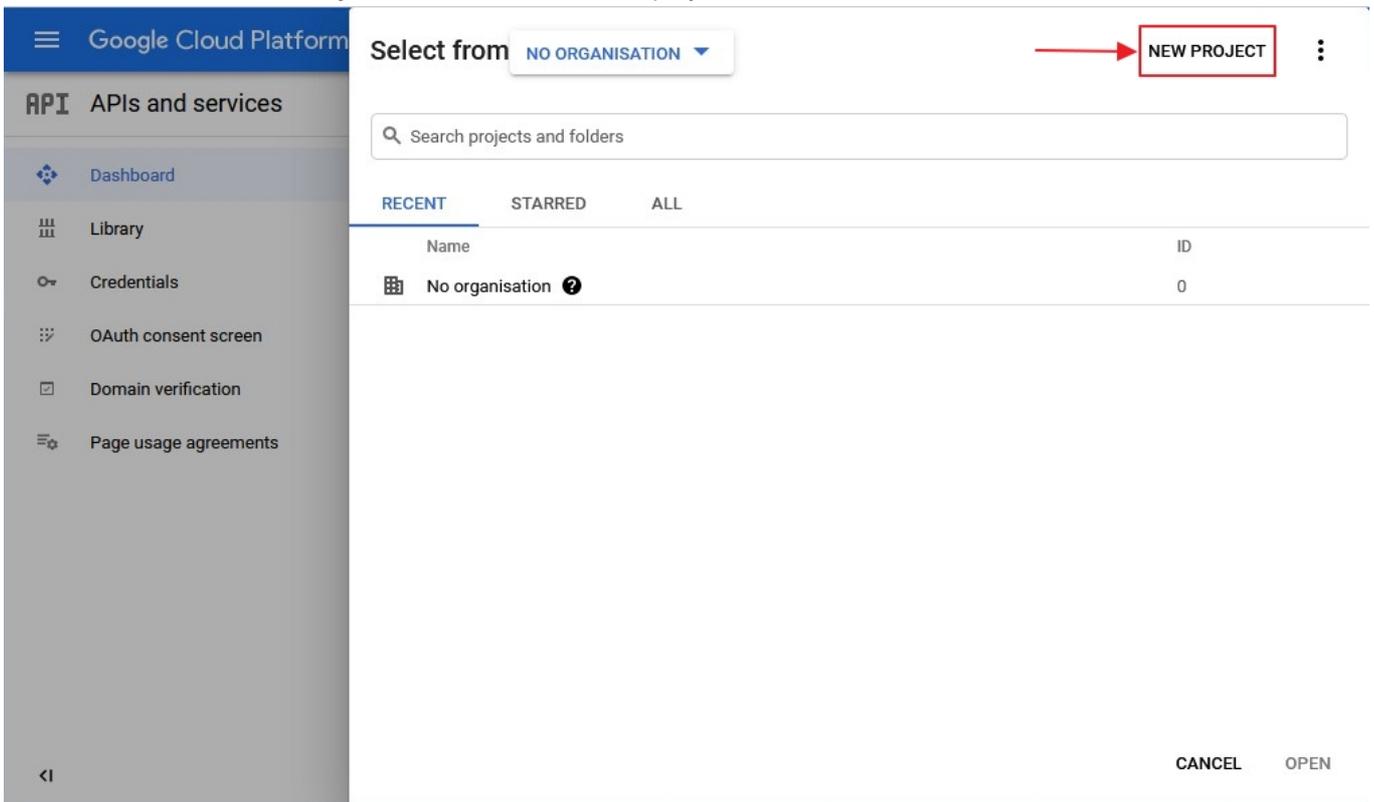

- Enter your Project name under the **Project Name** field and click on **Create**.

2nd Forbidden

You don't have permission to access this resource.

Additionally, a 403 Forbidden error was encountered while trying to use an ErrorDocument to handle the request.

New Project

Project name *

Project ID: -322611. It cannot be changed later. [EDIT](#)

Organisation *

Select an organisation to attach it to a project. This selection can't be changed later.

Location * [BROWSE](#)

Parent organisation or folder

[CREATE](#) [CANCEL](#)

- Go to **Navigation Menu > APIs > Services > Credentials**.

Google Cloud Platform PHPKB-OAuth Search products ...

APIs and services Credentials [+ CREATE CREDENTIALS](#) [DELETE](#)

Create credentials to access your enabled APIs. [Learn more](#)

Remember to configure the OAuth consent screen with information about your application.
[CONFIGURE CONSENT SCREEN](#)

API keys

<input type="checkbox"/>	Name	Creation date ↓	Restrictions	Key
No API keys to display				

OAuth 2.0 Client IDs

<input type="checkbox"/>	Name	Creation date ↓	Type	Client ID
No OAuth clients to display				

Service Accounts [Manage service accounts](#)

<input type="checkbox"/>	Email	Name ↑
No service accounts to display		

- Click on **Create Credentials** button and then select **OAuth Client ID** from the options provided.

3#1 Forbidden

You don't have permission to access this resource.

Additionally, a 403 Forbidden error was encountered while trying to use an ErrorDocument to handle the request.

Google Cloud Platform PHPKB-OAuth Search products ...

API APIs and services

Dashboard
Library
Credentials
OAuth consent screen
Domain verification
Page usage agreements

Credentials **+ CREATE CREDENTIALS** DELETE

Create credentials to access your project

Remember this information? **CONFIGURE**

API key
Identifies your project using a simple API key to check quota and access

OAuth client ID
Requests user consent so that your app can access the user's data.

Service account
Enables server-to-server, app-level authentication using robot accounts

Help me choose
Asks a few questions to help you decide which type of credential to use

API keys

Name

No API keys to display

OAuth 2.0 Client IDs

<input type="checkbox"/> Name	Creation date ↓	Type	Client ID
No OAuth clients to display			

Service Accounts [Manage service accounts](#)

<input type="checkbox"/> Email	Name ↑
No service accounts to display	

- In case you are facing some warning saying that in order to create an **OAuth Client ID**, you must set a product name on the consent screen. Click on the Configure consent screen button.

Google Cloud Platform PHPKB-OAuth Search products and resources

API APIs and services

Dashboard
Library
Credentials
OAuth consent screen
Domain verification
Page usage agreements

Create OAuth client ID

A client ID is used to identify a single app to Google's OAuth servers. If your app runs on multiple platforms, each will need its own client ID. See [Setting up OAuth 2.0](#) for more information.

WARNING To create an OAuth client ID, you must first set a product name on the consent screen. **CONFIGURE CONSENT SCREEN**



4#1 Forbidden

You don't have permission to access this resource.

Additionally, a 403 Forbidden error was encountered while trying to use an ErrorDocument to handle the request.

Google Cloud Platform PHPKB-OAuth Search products and resources

API APIs and services OAuth consent screen

- Dashboard
- Library
- Credentials
- OAuth consent screen**
- Domain verification
- Page usage agreements

Choose how you want to configure and register your app, including your target users. You can only associate one app with your project.

User Type

Internal ?

Only available to users within your organisation. You will not need to submit your app for verification. [Learn more](#)

External ?

Available to any test user with a Google Account. Your app will start in testing mode and will only be available to users that you add to the list of test users. Once your app is ready to push to production, you may need to verify your app. [Learn more](#)

CREATE

[Let us know what you think](#) about our OAuth experience

- Enter your product name under the **Product Name Shown** to Users field. Click on the **SAVE** button to save your settings.

Google Cloud Platform PHPKB-OAuth Search products and resources

API APIs and services Edit app registration

- Dashboard
- Library
- Credentials
- OAuth consent screen**
- Domain verification
- Page usage agreements

Application home page

Provide users a link to your home page

Application privacy policy link

Provide users a link to your public privacy policy

Application Terms of Service link

Provide users a link to your public Terms of Service

Authorised domains ?

When a domain is used on the consent screen or in an OAuth client's configuration, it must be pre-registered here. If your app needs to go through verification, please go to the [Google Search Console](#) to check if your domains are authorised. [Learn more](#) about the authorised domain limit.

phpkb.com

+ ADD DOMAIN

Developer contact information

Email addresses *

These email addresses are for Google to notify you about any changes to your project.

SAVE AND CONTINUE CANCEL

- Now for configuring scopes, click on **Add or Remove the Scopes** button.

5#1 Forbidden

You don't have permission to access this resource.

Additionally, a 403 Forbidden error was encountered while trying to use an ErrorDocument to handle the request.

Google Cloud Platform PHPKB-OAuth Search products and resources

API APIs and services Edit app registration

Dashboard
Library
Credentials
OAuth consent screen
Domain verification
Page usage agreements

OAuth consent screen — 2 **Scopes** — 3 Summary

Scopes express the permissions that you request users to authorise for your app and allow your project to access specific types of private user data from their Google Account. [Learn more](#)

ADD OR REMOVE SCOPES

- Now, select the **Scopes** to allow your project to access specific types of private user data from their Google Account and click on **Save and Continue** button.

- Go to the **Credentials** tab and click on **Create Credentials** button. Select **Web Application** from the dropdown list to create a new application.

Google Cloud Platform PHPKB-OAuth Search products and resources

API APIs and services Create OAuth client ID

Dashboard
Library
Credentials
OAuth consent screen
Domain verification
Page usage agreements

A client ID is used to identify a single app to Google's OAuth servers. If your app runs on multiple platforms, each will need its own client ID. See [Setting up OAuth 2.0](#) for more information.

Application type *

- Web application
- Android
- Chrome app
- iOS
- TVs and Limited Input devices
- Desktop app
- Universal Windows Platform (UWP)

- Enter the name you want for your Client ID under the name field and enter the **Redirect / Callback URI** from PHPKB OAuth / OpenID-Connect plugin under the Redirect URL field.

6#1 Forbidden

You don't have permission to access this resource.

Additionally, a 403 Forbidden error was encountered while trying to use an ErrorDocument to handle the request.

Google Cloud Platform PHPKB-OAuth Search products and resources

API APIs and services

← Create OAuth client ID

A client ID is used to identify a single app to Google's OAuth servers. If your app runs on multiple platforms, each will need its own client ID. See [Setting up OAuth 2.0](#) for more information.

Application type *
Web application

[Learn more](#) about OAuth client types

Name *
PHPKB-OAuth-CL

The name of your OAuth 2.0 client. This name is only used to identify the client in the console and will not be shown to end users.

The domains of the URIs you add below will be automatically added to your [OAuth consent screen](#) as [authorised domains](#).

Authorised JavaScript origins ?
For use with requests from a browser

+ ADD URI

Authorised redirect URIs ?
For use with requests from a web server

URIs *

+ ADD URI

CREATE CANCEL


◀

- Click on the SAVE button to save your configurations. Now, you have successfully completed your Google App OAuth Server side configurations.

7#1 Forbidden

You don't have permission to access this resource.

Additionally, a 403 Forbidden error was encountered while trying to use an ErrorDocument to handle the request.

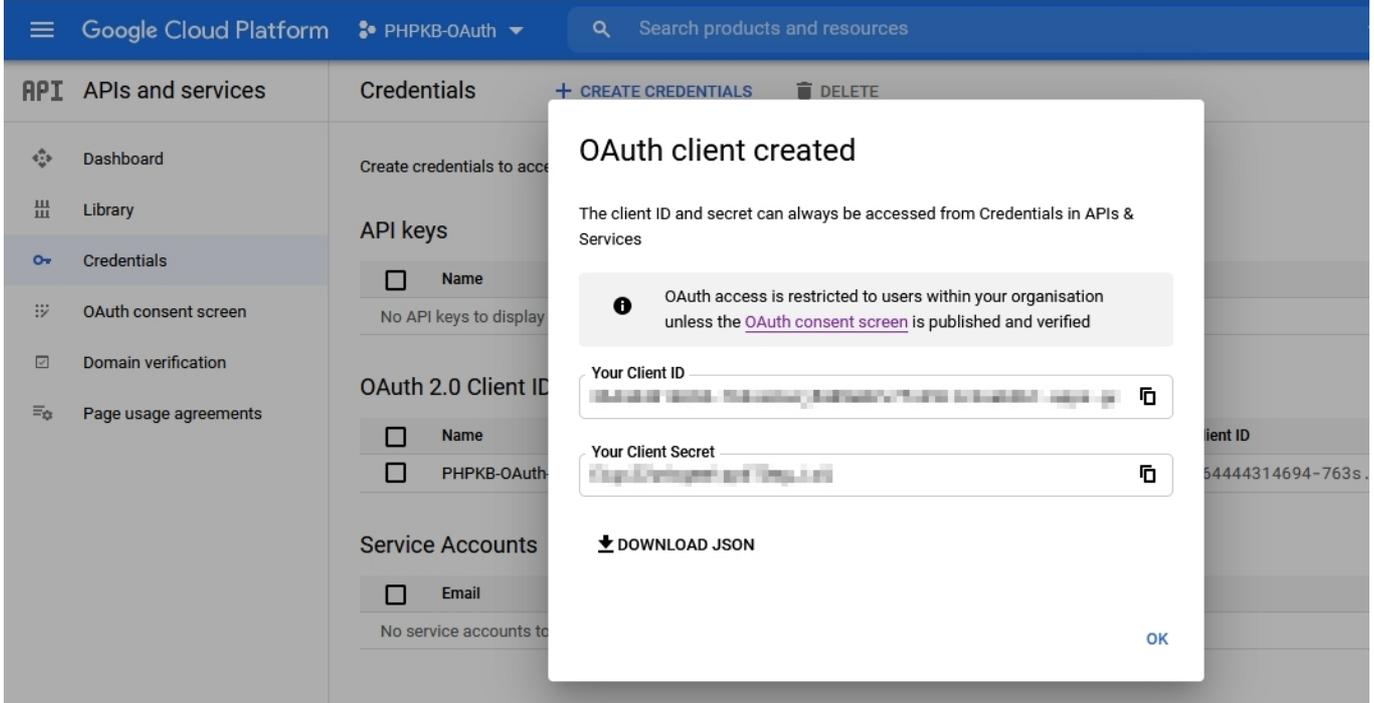

Google Endpoints and Scope:

Scope	openid email
Authorize Endpoint	https://accounts.google.com/o/oauth2/auth
Access Token Endpoint	https://www.googleapis.com/oauth2/v4/token
Get User Info Endpoint	https://www.googleapis.com/oauth2/v1/userinfo
Grant Type	Authorization Code

Step 2: Setup PHPKB as OAuth Client

- Login to **Administrator Control Panel** as **Superuser** and go to **Tools > OAuth / OpenID-Connect**.
- Let's configure the **Basic Configuration**.

 **Tip:** For easier configuration, there are helpful notes added under the fields/options where it is needed.

8#1 Forbidden

You don't have permission to access this resource.

Additionally, a 403 Forbidden error was encountered while trying to use an ErrorDocument to handle the request.

ADVANCED SETTINGS

You can configure more options, like Create user if not exists, Keep existing users, Update user data, Default group(s) assignment, and Default Role.

Create user if not exists? Yes

Auto-provisioning. If user does not exist, PHPKB will create a new user with the data provided by the Identity Provider.

Auto-linking existing users? Yes

If a PHPKB account already exists with the same identity as a newly-authenticated user over OpenID Connect, login as that user instead of generating an error.

Update User Data? Yes

Auto-update. PHPKB will update the account details of user with the data provided by the server.

Match PHPKB account by

email

Select what field will be used in order to find the user account. If "email", the plugin will prevent the user from changing his/her email address in My Profile page.

Default Group(s) Assignment

Choose default group(s) assignment

The default group(s) that will be assigned to Member users when they would log in to PHPKB via OAuth.

- Then configure the **Attribute Mapping** section.

 **Tip:** To create users as Member users, you can set the '**Default Role**' as '**Member**', otherwise, change it accordingly.

ATTRIBUTE MAPPING

Sometimes the names of the attributes sent by the identity provider do not match the names used by PHPKB for the user accounts. In this section you can set the mapping between provider fields and PHPKB fields. Note: This mapping may also be set at identity provider's side (if supported).

Username *	<input type="text" value="email"/>
Email *	<input type="text" value="email"/>
First Name	<input type="text" value="name"/>
Last Name	<input type="text"/>
Role	<input type="text"/>
The attribute that contains the role of the user, for example 'memberOf'.	
Default Role	<input type="text" value="Member"/>
Default role assignment to all users.	

- The next is the **Role Mapping** section where you can map the roles returned by IdP with the roles that are available in PHPKB.

 If your IdP does not return any roles then you can skip this section.

1711 Forbidden

You don't have permission to access this resource.

Additionally, a 403 Forbidden error was encountered while trying to use an ErrorDocument to handle the request.

ROLE MAPPING

The Identity Provider can use its own roles. In this section, you can set the mapping between IdP and PHPKB roles. Accepts comma separated values. Example: admin,owner,superuser

Member

Writer

Writer-Trusted

Editor

Superuser

- Then you can set **Role Precedence** for different roles.

 If your IdP does not return any roles then you can skip this section.

ROLE PRECEDENCE

In some cases, the IdP returns more than one role. In this section, you can set the precedence of the different roles. The smallest integer will be the role chosen.

Member

Writer

Writer-Trusted

Editor

Superuser

- Finally, set up **Security Settings** accordingly (if needed).

SECURITY SETTINGS

Configure Proxy and **cert** (certificate) path.

Configure Proxy?

Configure a proxy. For example: http://my.proxy.com:80

Configure Cert Path?

Configure a cert. For example: /path/to/my.cert

- Test the configuration by going to the **Login** page (either in the Public area or Admin area).

That's all! By following these steps, you can configure Google as an OAuth Provider in PHPKB, providing users with a convenient and secure way to access the system.

Online URL: <https://www.phpkb.com/kb/article/configuring-google-as-an-oauth-provider-in-phpkb-265.html>

1711 Forbidden

You don't have permission to access this resource.

Additionally, a 403 Forbidden error was encountered while trying to use an ErrorDocument to handle the request.